Single Phase Hybrid Storage Inverter

1-6 kW



The Solareast Ares low voltage series storage Inverters are designed to increase energy independence for homeowners. The power range is from 1kW to 6kW, compatible with low voltage (40-60V) batteries.

Energy management is based on time-of-use and demand charge rate structures, which significantly reduce the amount of energy purchased from the public grid.

Thanks for the UPS function (switch time < 10ms), that enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

The Ares low voltage series storage inverters are integrated with Arc Fault Circuit Interrupter (AFCI) and rapid shutdown.

- **PV OVERSIZE** — 1.5 Times PV Oversize
- **MPPT CHANNELS** — Up to 2 MPPT Channels
- **UPS FUNCTION** — Switch Time < 10ms
- **PARALLEL** — Max.6 Parallel Stacking
- **INPUT** — Support Generator

- Support for Time-of-use Optimization
- Configurable Operation Modes
- Arc Fault Circuit Interrupter (AFCI) (Optional)
- Build in Anti-feed-in Function
- Compact Size and Easy Installation
- Smart Monitoring & Remote Firmware Upgrade

Single Phase Hybrid Storage Inverter

4-6 kW Plus Series



The Solareast Ares low voltage series storage Inverters are designed to increase energy independence for homeowners. The power range is from 4kW to 6kW, compatible with low voltage (40-60V) batteries.

Energy management is based on time-of-use and demand charge rate structures, which significantly reduce the amount of energy purchased from the public grid.

Thanks for the UPS function (switch time < 10ms), that enables the crucial loads power on during outages. Additionally, under the backup operation mode, the inverter provides you up to 150% peak output overloading.

The Ares low voltage series storage inverters are integrated with Arc Fault Circuit Interrupter (AFCI) and rapid shutdown.


- **MAX. 120A** — Max. Charge/ Discharge Current 120A
- **PV OVERSIZE** — 1.5 Times PV Oversize
- **MPPT CHANNELS** — Up to 2 MPPT Channels
- **UPS FUNCTION** — Switch Time < 10ms
- **PARALLEL** — Max.6 Parallel Stacking

- Support for Time-of-use Optimization
- Configurable Operation Modes
- Arc Fault Circuit Interrupter (AFCI) (Optional)
- The charging and discharging power of the battery is greater
- Build in Anti-feed-in Function
- Compact Size and Easy Installation
- Smart Monitoring & Remote Firmware Upgrade
- Off-grid mode, with a larger load capacity, the maximum load can be 6KVA


Technical Data	Ares 1KL1	Ares 1.5KL1	Ares 2KL1	Ares 2.5KL1	Ares 3KL1	Ares 3.6KL1
PV Input						
Max. Input Power (kW)	1.5	2.3	3.0	3.8	4.5	5.4
Max. PV Voltage (V)	550					
MPPT Range (V)	80 - 500					
Full MPPT Range (V)	80 - 500	90 - 500	120 - 500	150 - 500	170 - 500	210 - 500
Normal Voltage (V)	360					
Startup Voltage (V)	100					
Max. Input Current (A)	18.5 x 1					
Max. Short Current (A)	26 x 1					
No. of MPP Tracker / No. of PV String	1 / 1					
Battery Port						
Max. Charge/Discharge Power (kW)	1.0	1.5	2.0	2.5	3.0	3.6
Max. Charge/Discharge Current (A)	25	40	50	63	80	80
Battery Normal Voltage (V)	51.2					
Battery Voltage Range (V)	40 - 60					
Battery Type	Li-ion / Lead-acid etc.					
AC Grid						
Max Continuous Current (A)	5.0	7.0	10.0	12.0	14.0	17.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5	3.0	3.6
Nominal Grid Current (A)	4.6 / 4.4	6.9 / 6.6	9.1 / 8.7	11.4 / 10.9	13.7 / 13.1	16.4 / 15.7
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230					
Nominal Grid Frequency (Hz)	50 / 60					
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)					
Current THD (%)	< 3					
AC Load Output						
Max Continuous Current (A)	5.0	7.0	10.0	12.0	14.0	17.0
Max Continuous Power (kVA)	1.0	1.5	2.0	2.5	3.0	3.6
Max Peak Current (A) (10min)	6.9 / 6.6	10.5 / 10.0	13.7 / 13.1	17.3 / 16.6	20.5 / 19.6	24.6 / 23.5
Max Peak Power (kVA) (10min)	1.5	2.3	3.0	3.8	4.5	5.4
Nominal AC Voltage L-N (V)	220 / 230					
Nominal AC Frequency (Hz)	50 / 60					
Switching Time (ms)	Seamless					
Voltage THD (%)	< 3					
Efficiency						
CEC Efficiency (%)	97.0					
Max. Efficiency (%)	97.6					
PV to Bat. Efficiency (%)	98.1					
Bat. between AC Efficiency (%)	96.8					
Protection						
PV Reverse Polarity Protection	Yes					
Over Current/Voltage Protection	Yes					
Anti-Islanding Protection	Yes					
AC Short Circuit Protection	Yes					
Residual Current Detection	Yes					
Ground Fault Monitoring	Yes					
Insulation Resister Detection	Yes					
PV Arc Detection	Yes					
Enclosure Protect Level	IP65 / NEMA4X					
General Data						
Dimensions (W x H x D, mm)	370 x 535 x 192					
Weight (kg)	18.5					
Topology	Transformerless					
Cooling	Intelligent Fan					
Relative Humidity	0 - 100 %					
Operating Temperature Range (°C)	- 25 to 60					
Operating Altitude (m)	< 4000					
Noise Emission (dB)	< 25					
Standby Consumption (W)	< 10					
Mounting	Wall Bracket					
Communication with RSD	SUNSPEC					
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G					
Certification & Approvals	NRS097, G98, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2					
EMC	EN61000-6-2, EN61000-6-3					

Technical Data	Ares 3KL	Ares 3.6KL	Ares 4KL	Ares 4.6KL	Ares 5KL	Ares 5.5KL	Ares 6KL
PV Input							
Max. Input Power (kW)	4.5	5.4	6.0	6.9	7.5	8.3	9.0
Max. PV Voltage (V)	550						
MPPT Range (V)	80 - 500						
Full MPPT Range (V)	90 - 500	110 - 500	120 - 500	130 - 500	150 - 500	160 - 500	170 - 500
Normal Voltage (V)	360						
Startup Voltage (V)	100						
Max. Input Current (A)	18.5 x 2						
Max. Short Current (A)	26 x 2						
No. of MPP Tracker / No. of PV String	2 / 2						
Battery Port							
Max. Charge/Discharge Power (kW)	3.0	3.6	4.0	4.6	4.8	4.8	4.8
Max. Charge/Discharge Current (A)	80						
Battery Normal Voltage (V)	51.2						
Battery Voltage Range (V)	40 - 60						
Battery Type	Li-ion / Lead-acid etc.						
AC Grid							
Max Continuous Current (A)	14.0	17.0	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5	6.0
Nominal Grid Current (A)	13.7 / 13.1	16.4 / 15.7	18.2 / 17.4	21.0 / 20.0	22.8 / 21.8	25.0 / 24.0	27.3 / 26.1
Nominal Grid Voltage (V)	198 to 242 @ 220 / 207 to 253 @ 230						
Nominal Grid Frequency (Hz)	50 / 60						
Power Factor	0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)						
Current THD (%)	< 3						
AC Load Output							
Max Continuous Current (A)	14.0	17.0	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	3.0	3.6	4.0	4.6	5.0	5.5	6.0
Max Peak Current (A) (10min)	20.5 / 19.6	24.6 / 23.5	27.3 / 26.1	31.4 / 30	34.1 / 32.7	37.8 / 36.1	41.0 / 39.2
Max Peak Power (kVA) (10min)	4.5	5.4	6.0	6.9	7.5	8.3	9.0
Nominal AC Voltage L-N (V)	220 / 230						
Nominal AC Frequency (Hz)	50 / 60						
Switching Time (ms)	Seamless						
Voltage THD (%)	< 3						
Efficiency							
CEC Efficiency (%)	97.0						
Max. Efficiency (%)	97.6						
PV to Bat. Efficiency (%)	98.1						
Bat. between AC Efficiency (%)	96.8						
Protection							
PV Reverse Polarity Protection	Yes						
Over Current/Voltage Protection	Yes						
Anti-Islanding Protection	Yes						
AC Short Circuit Protection	Yes						
Residual Current Detection	Yes						
Ground Fault Monitoring	Yes						
Insulation Resister Detection	Yes						
PV Arc Detection	Yes						
Enclosure Protect Level	IP65 / NEMA4X						
General Data							
Dimensions (W x H x D, mm)	370 x 535 x 192						
Weight (kg)	18.5			20.5			
Topology	Transformerless						
Cooling	Intelligent Fan						
Relative Humidity	0 - 100 %						
Operating Temperature Range (°C)	- 25 to 60						
Operating Altitude (m)	< 4000						
Noise Emission (dB)	< 25						
Standby Consumption (W)	< 10						
Mounting	Wall Bracket						
Communication with RSD	SUNSPEC						
Display & Communication Interfaces	LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G						
Certification & Approvals	NRS097, G98/G99, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2						
EMC	EN61000-6-2, EN61000-6-3						

For New Storage System:

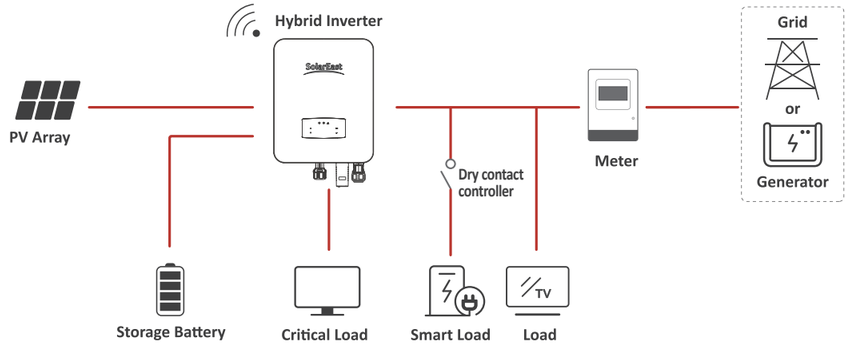


Optimizing Self-Consumption (on-grid) + Emergency Power Supply (off-grid)

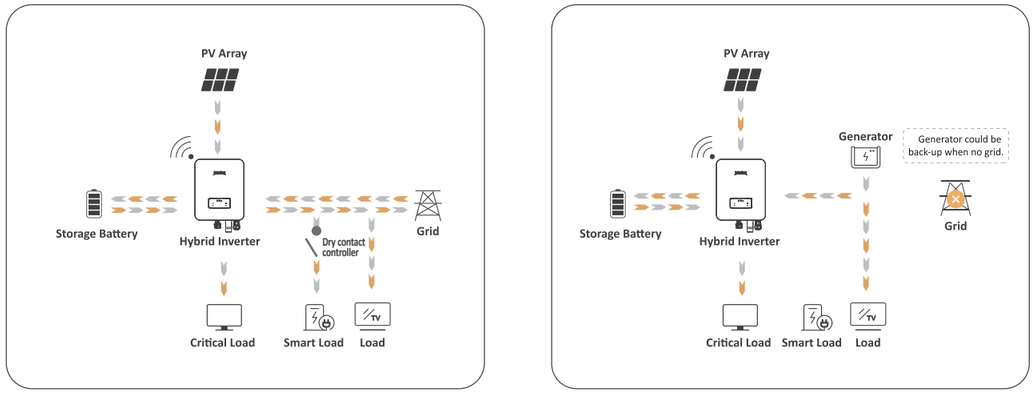

Optimizing Self-Consumption Mode

With home energy storage installed, home owners may also be able to change from a flat rate electricity tariff to a time-of-use tariff. For the areas and regions, where peak shaving can be applied.

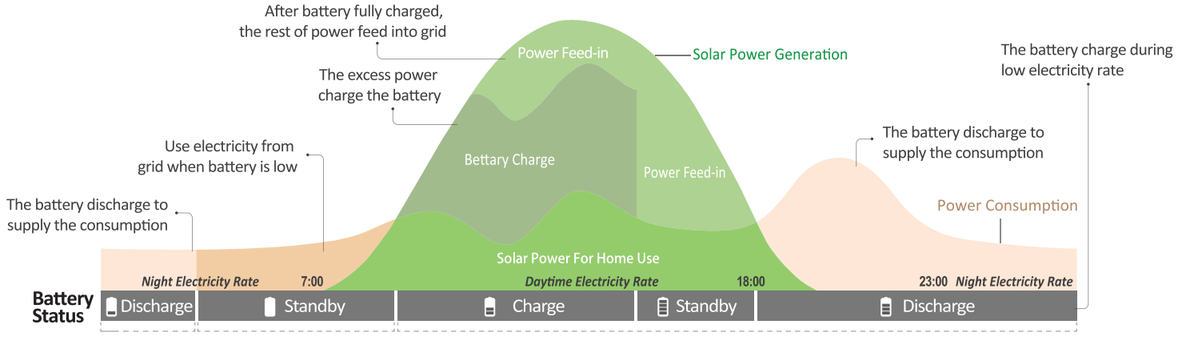

Technical Data	Ares 4KLP	Ares 4.6KLP	Ares 5KLP	Ares 5.5KLP	Ares 6KLP
PV Input					
Max. Input Power (kW)	6	6.9	7.5	8.3	9
Max. PV Voltage (V)			550		
MPPT Range (V)			80 - 500		
Full MPPT Range (V)	120 - 500	130 - 500	150 - 500	160 - 500	170 - 500
Normal Voltage (V)			360		
Startup Voltage (V)			100		
Max. Input Current (A)			18.5 x 2		
Max. Short Current (A)			26 x 2		
No. of MPP Tracker / No. of PV String			2 / 2		
Battery Port					
Max. Charge/Discharge Power (kW)	4.0	4.6	5.0	5.5	6.0
Max. Charge/Discharge Current (A)			120		
Battery Normal Voltage (V)			51.2		
Battery Voltage Range (V)			40 - 60		
Battery Type			Li-ion / Lead-acid etc.		
AC Grid					
Max Continuous Current (A)	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	4.0	4.6	5.0	5.5	6.0
Nominal Grid Current (A)	18.2 / 17.4	21.0 / 20.0	22.8 / 21.8	25.0 / 24.0	27.3 / 26.1
Nominal Grid Voltage (V)			198 to 242 @ 220 / 207 to 253 @ 230		
Nominal Grid Frequency (Hz)			50 / 60		
Power Factor			0.999 (Adjustable from 0.8 overexcited to 0.8 underexcited)		
Current THD (%)			< 3		
AC Load Output					
Max Continuous Current (A)	19.0	22.0	23.0	26.0	28.0
Max Continuous Power (kVA)	4.0	4.6	5.0	5.5	6.0
Max Peak Current (A) (10min)	27.3 / 26.1	31.4 / 30	34.1 / 32.7	37.8 / 36.1	41.0 / 39.2
Max Peak Power (kVA) (10min)	6.0	6.9	7.5	8.3	9.0
Nominal AC Voltage L-N (V)			220 / 230		
Nominal AC Frequency (Hz)			50 / 60		
Switching Time (ms)			Seamless		
Voltage THD (%)			< 3		
Efficiency					
CEC Efficiency (%)			97.0		
Max. Efficiency (%)			97.6		
PV to Bat. Efficiency (%)			98.1		
Bat. between AC Efficiency (%)			96.8		
Protection					
PV Reverse Polarity Protection			Yes		
Over Current/Voltage Protection			Yes		
Anti-Islanding Protection			Yes		
AC Short Circuit Protection			Yes		
Residual Current Detection			Yes		
Ground Fault Monitoring			Yes		
Insulation Resister Detection			Yes		
PV Arc Detection			Yes		
Enclosure Protect Level			IP65 / NEMA4X		
General Data					
Dimensions (W x H x D, mm)			370 x 535 x 192		
Weight (kg)			20.5		
Topology			Transformerless		
Cooling			Intelligent Fan		
Relative Humidity			0 - 100 %		
Operating Temperature Range (°C)			- 25 to 60		
Operating Altitude (m)			< 4000		
Noise Emission (dB)			< 25		
Standby Consumption (W)			< 10		
Mounting			Wall Bracket		
Communication with RSD			SUNSPEC		
Display & Communication Interfaces			LCD, LED, RS485, CAN, Wi-Fi, GPRS, 4G		
Certification & Approvals			NRS097, G98, EN50549-1, C10/C11, AS4777.2, VDE-AR-N4105, VDE0126, IEC62109-1, IEC62109-2		
EMC			EN61000-6-2, EN61000-6-3		